




# United States Department of the Interior

## BUREAU OF RECLAMATION

Upper Colorado Regional Office  
125 South State Street, Room 6107  
Salt Lake City, Utah 84138-1102



IN REPLY REFER TO

UC-326  
ENV-6.00

OCT 25 1996

GCMRC Library  
DO NOT REMOVE

To: All on the Enclosed List

Subject: Record of Decision (ROD) on the Operation of Glen Canyon Dam Final Environmental Impact Statement (EIS)

We are pleased to provide you with the enclosed copy of the subject ROD which was signed by the Secretary of the Interior on October 9, 1996. We are deeply appreciative of your participation in this long, but highly successful process.

You will note that only two of the attachments to the ROD are included in the enclosed copy. Attachment 3, the GCES Non-Use Values Final Study Summary Report, is available on the Internet at <http://www.uc.usbr.gov> which is the Upper Colorado Region's home page. Attachment 4, the General Accounting Office's Final Audit Report (GAO/RCED-97-12) may be obtained by calling (202) 512-6000, or on the Internet at <http://www.gao.gov> which is the General Accounting Office's home page.

If you have any questions about the ROD, please contact either Bruce Moore at (801) 524-5415, or Gordon Lind at (801) 524-3216.

Sincerely,

Charles A. Calhoun  
Regional Director

Enclosure

GCMRC Library  
DO NOT REMOVE

131.00  
LAW-3.00  
C719c(h)


**RECORD OF DECISION**

**OPERATION OF GLEN CANYON DAM**

**Final Environmental Impact Statement**

October 1996

Approved

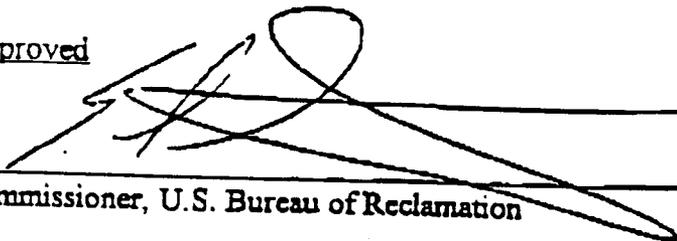

\_\_\_\_\_  
Commissioner, U.S. Bureau of Reclamation

Date OCT 08 1996



\_\_\_\_\_  
Secretary of the Interior

OCT 09 1996

Date \_\_\_\_\_

## RECORD OF DECISION

### OPERATION OF GLEN CANYON DAM FINAL ENVIRONMENTAL IMPACT STATEMENT

#### I. INTRODUCTION

This record of decision (ROD) of the Department of the Interior, Bureau of Reclamation (Reclamation), documents the selection of operating criteria for Glen Canyon Dam, as analyzed in the final Environmental Impact Statement (EIS), dated March 21, 1995 (FES 95-8). The EIS on the operation of Glen Canyon Dam was prepared with an unprecedented amount of scientific research, public involvement, and stakeholder cooperation.

Scientific evidence gathered during Phase I of the Glen Canyon Environmental Studies (GCES) indicated that significant impacts on downstream resources were occurring due to the operation of Glen Canyon Dam. These findings led to a July 1989 decision by the Secretary of the Interior for Reclamation to prepare an EIS to reevaluate dam operations. The purpose of the reevaluation was to determine specific options that could be implemented to minimize, consistent with law, adverse impacts on the downstream environment and cultural resources, as well as Native American interests in Glen and Grand Canyons. Analysis of an array of reasonable alternatives was needed to allow the Secretary to balance competing interests and to meet statutory responsibilities for protecting downstream resources and producing hydropower, and to protect affected Native American interests.

In addition, the Grand Canyon Protection Act of 1992 was enacted on October 30, 1992. Section 1802 (a) of the Act requires the Secretary to operate Glen Canyon Dam:

"...in such a manner as to protect, mitigate adverse impacts to, and improve the values for which Grand Canyon National Park and Glen Canyon National Recreation Area were established, including, but not limited to natural and cultural resources and visitor use."

Alternatives considered include the No Action Alternative as well as eight operational alternatives that provide various degrees of protection for downstream resources and hydropower production.

## II. DECISION

The Secretary's decision is to implement the Modified Low Fluctuating Flow Alternative (the preferred alternative) as described in the final EIS on the Operation of Glen Canyon Dam with a minor change in the timing of beach/habitat building flows (described below). This alternative was selected because it will reduce daily flow fluctuations well below the no action levels (historic pattern of releases) and will provide high steady releases of short duration which will protect or enhance downstream resources while allowing limited flexibility for power operations.

The Modified Low Fluctuating Flow Alternative incorporates beach/habitat-building flows which are scheduled high releases of short duration designed to rebuild high elevation sandbars, deposit nutrients, restore backwater channels, and provide some of the dynamics of a natural system. In the final EIS, it was assumed that these flows would occur in the spring when the reservoir is low, with a frequency of 1 in 5 years.

The Basin States expressed concern over the beach/habitat-building flows described in the final EIS because of the timing of power plant by-passes. We have accommodated their concerns, while maintaining the objectives of the beach/habitat-building flows. Instead of conducting these flows in years in which Lake Powell storage is low on January 1, they will be accomplished by utilizing reservoir releases in excess of power plant capacity required for dam safety purposes. Such releases are consistent with the 1956 Colorado River Storage Project Act, the 1968 Colorado River Basin Project Act, and the 1992 Grand Canyon Protection Act.

Both the Colorado River Management Work Group and the Transition Work Group, which participated in the development of the Annual Operating Plan and the EIS, respectively, support this change as it conforms unambiguously with each member's understanding of the Law of the River. These groups include representatives of virtually all stakeholders in this process.

The upramp rate and maximum flow criteria were also modified between the draft and final EIS. The upramp rate was increased from 2,500 cubic feet per second per hour to 4,000 cubic feet per second per hour, and the maximum allowable release was increased from 20,000 to 25,000 cubic feet per second. We made these modifications to enhance power production flexibility, as suggested by comments received. These modifications were controversial among certain interest groups because of concerns regarding potential impacts on resources in the Colorado River and the Grand Canyon. However, our analysis indicates that there would be no significant differences in impacts associated with these changes ("Assessment of Changes to the Glen Canyon Dam EIS Preferred Alternative from Draft to Final EIS", October 1995).

The 4,000 cubic feet per second per hour upramp rate limit will be implemented with the understanding that results from the monitoring program will be carefully considered. If impacts differing from those described in the final EIS are identified, a new ramp rate criterion will be considered by the Adaptive Management Work Group and a recommendation for action forwarded to the Secretary.

The maximum flow criterion of 25,000 cubic feet per second will be implemented with the understanding that actual maximum daily releases would only occasionally exceed 20,000 cubic feet per second during a minimum release year of 8.23 million acre-feet. This is because the maximum allowable daily change constraint overrides the maximum allowable release and because monthly release volumes are lower during minimum release years. If impacts differing from those described in the final EIS are identified through the Adaptive Management Program, the maximum flow restriction will be reviewed by the Adaptive Management Work Group and a recommendation for action will be forwarded to the Secretary.

### III. DESCRIPTION OF ALTERNATIVES

Nine alternative methods of operating Glen Canyon Dam (including the No Action Alternative) were presented in the final EIS. The eight action alternatives were designed to provide a reasonable range of alternatives with respect to operation of the dam. One alternative would allow unrestricted fluctuations in flow (within the physical constraints of the power plant) to maximize power production, four would impose varying restrictions on fluctuations, and three others would provide steady flows on a monthly, seasonal, or annual basis. The names of the alternatives reflect the various operational regimes. In addition, the restricted fluctuating flow and steady flow alternatives each include seven elements which are common to all of them. These common elements are: 1) Adaptive Management, 2) Monitoring and Protecting Cultural Resources, 3) Flood Frequency Reduction Measures, 4) Beach/Habitat-Building Flows, 5) New Population of Humpback Chub, 6) Further Study of Selective Withdrawal, and 7) Emergency Exception Criteria. A detailed description of the alternatives and common elements can be found in Chapter 2 of the final EIS. A brief description of the alternatives is given below.

#### UNRESTRICTED FLUCTUATING FLOWS

**No Action:** Maintain the historic pattern of fluctuating releases up to 31,500 cubic feet per second and provide a baseline for impact comparison.

**Maximum Power plant Capacity:** Permit use of full power plant capacity up to 33,200 cubic feet per second.

#### RESTRICTED FLUCTUATING FLOWS

**High:** Slightly reduce daily fluctuations from historic levels.

**Moderate:** Moderately reduce daily fluctuations from historic levels; includes habitat maintenance flows.

**Modified Low (Preferred Alternative):** Substantially reduce daily fluctuations from historic levels; includes habitat maintenance flows.

**Interim Low:** Substantially reduce daily fluctuations from historic levels; same as interim operations except for addition of common elements.

## STEADY FLOWS

**Existing Monthly Volume:** Provide steady flows that use historic monthly release strategies.

**Seasonally Adjusted:** Provide steady flows on a seasonal or monthly basis; includes habitat maintenance flows.

**Year-Round:** Provide steady flows throughout the year.

Table 1 shows the specific operational criteria for each of the alternatives.

## IV. SIGNIFICANT ISSUES AND ALTERNATIVES

The Glen Canyon Dam EIS scoping process was initiated in early 1990 and the public was invited to comment on the appropriate scope of the EIS. More than 17,000 comments were received during the scoping period, reflecting the national attention and intense interest in the EIS.

As a result of the analysis of the oral and written scoping comments, the following were determined to be resources or issues of public concern: beaches, endangered species, ecosystem integrity, fish, power costs, power production, sediment, water conservation, rafting/boating, air quality, the Grand Canyon wilderness, and a category designated as "other" for remaining concerns. Comments regarding interests and values were categorized as: expressions about the Grand Canyon, economics, nonquantifiable values, nature versus human use, and the complexity of Glen Canyon Dam issues.

The EIS team consolidated and refined the public issues of concern, identifying the significant resources and associated issues to be analyzed in detail. These resources include: water, sediment, fish, vegetation, wildlife and habitat, endangered and other special status species, cultural resources, air quality, recreation, hydropower, and non-use value.

Further meetings were held with representatives from the cooperating agencies and public interest groups who provided comments on the criteria for development of reasonable alternatives for the EIS. The public also had an opportunity to comment on the preliminary selection of alternatives at public meetings and through mailings. The final selection of alternatives took into consideration the public's views.

## V. COMMENTS RECEIVED ON THE FINAL EIS

Many comments and recommendations on the final EIS were received in the form of pre-printed postcards and letters that addressed essentially the same issues. The comments are summarized below along with Reclamation's responses.

**COMMENT: Maintain Draft EIS flows.** Modifying the upramp rate and maximum flows

Table 1.—Operating limits of alternatives identified for detailed analysis

	Unrestricted Fluctuating Flows		Restricted Fluctuating Flows					Steady Flows		
	No Action	Maximum Powerplant Capacity	High	Moderate	Modified Low	Interim Low	Existing Monthly Volume	Seasonally Adjusted	Year-Round	
Minimum releases (cfs) <sup>1</sup>	1,000 Labor Day-Easter 23,000 Easter-Labor Day	1,000 Labor Day-Easter 23,000 Easter-Labor Day	3,000 5,000 8,000 depending on monthly volume, firm load, and market conditions	5,000	8,000 between 7 a.m. and 7 p.m. 5,000 at night	8,000 between 7 a.m. and 7 p.m. 5,000 at night	8,000	28,000 Oct Nov 8,500 Dec 11,000 Jan Mar 12,500 Apr 18,000 May-Jun 12,500 Jul 9,000 Aug Sep	Yearly volume prorated <sup>4</sup>	
Maximum releases (cfs) <sup>2</sup>	31,500	33,200	31,500	31,500 (may be exceeded during habitat maintenance flows)	25,000 (exceeded during habitat maintenance flows)	20,000	Monthly volumes prorated	18,000 (exceeded during habitat maintenance flows)	Yearly volume prorated <sup>4</sup>	
Allowable daily flow fluctuations (cfs/24 hours) <sup>3</sup>	30,500 Labor Day-Easter 28,500 Easter-Labor Day	32,200 Labor Day-Easter 30,200 Easter-Labor Day	15,000 to 22,000	±45% of mean flow for the month not to exceed ±6,000	5,000 5,000 or 8,000	5,000 6,000 or 8,000	±1,000	±1,000	±1,000	
Ramp rates (cfs/hour)	Unrestricted	Unrestricted	Unrestricted up 5,000 or 4,000 down	4,000 up 2,500 down	4,000 up 1,500 down	2,500 up 1,500 down	2,000 cfs/day between months	2,000 cfs/day between months	2,000 cfs/day between months	
Common elements	None	None	Adaptive management (including long-term monitoring and research) Monitoring and protecting cultural resources Flood frequency reduction measures Beach/habitat-building flows New population of humpback chub Further study of selective withdrawal Emergency exception criteria							

<sup>1</sup> In high volume release months, the allowable daily change would require higher minimum flows (cfs).

<sup>2</sup> Releases each weekday during recreation season (Easter to Labor Day) would average not less than 8,000 cfs for the period from 8 a.m. to midnight.

<sup>3</sup> Based on an 8.23-million-acre-foot (maf) year, in higher release years, additional water would be added equally to each month, subject to an 18,000-cfs maximum.

<sup>4</sup> For an 8.23-maf year, steady flow would be about 11,400 cfs.

<sup>5</sup> Maximums represent normal or routine limits and may necessarily be exceeded during high water years.

<sup>6</sup> Daily fluctuation limit of 5,000 cfs for monthly release volumes less than 600,000 acre-feet; 6,000 cfs for monthly release volumes of 600,000 to 800,000 acre-feet; and 8,000 cfs for monthly volumes over 800,000 acre-feet.

<sup>7</sup> Adjustments would allow for small power system load changes.

between the draft and final EIS has neither been open for public review nor subjected to serious scientific scrutiny. These changes should have been addressed in the draft EIS and made available for public comment at that time. Credible proof, based on the testing of a specific scientific hypothesis, that alterations in operating procedures at Glen Canyon Dam follow the spirit and intent of the Grand Canyon Protection Act needs to be provided. The burden of proof that there will be no impact on downstream resources rests with those proposing changes.

**RESPONSE:** The modification of the preferred alternative, which incorporated changes in the upramp rate and maximum flows, was made after extensive public discussion. The new preferred alternative was discussed as an agenda item during the May, June, August, and November 1994 public meetings of the Cooperating Agencies who assisted in the development of the EIS. A wide range of public interest groups received advance mailings and agendas and were represented at the public meetings. The environmental groups attending these meetings included: America Outdoors, American Rivers, Desert Flycasters, Environmental Defense Fund, Friends of the River, Grand Canyon River Guides, Grand Canyon Trust, Sierra Club, and Trout Unlimited. Meeting logs indicate that representatives from at least some of these groups attended all but the May meeting. In addition, approximately 16,000 citizens received periodic newsletters throughout the EIS process. This included a newsletter outlining the proposed changes issued several months prior to the final EIS. The environmental groups mentioned above were included on the newsletter mailing list.

Reclamation's research and analysis has been thorough with regards to changes in flows and ramping rates and potential impacts upon downstream resources. A complete range of research flows was conducted from June 1990 to July 1991. These included high and low fluctuating flows with fast and slow up and down ramp rates. Glen Canyon Environmental Studies Phase II identified cause and effect relationships between downramp rates and adverse impacts to canyon resources. However, no cause and effect relationships between upramp rates and adverse impacts to canyon resources were identified. The draft EIS, (a public document peer reviewed by GCES and the EIS Cooperating Agencies) states that upramp rates have not been linked to sandbar erosion (page 95) and that "Rapid increases in river stage would have little or no effect on sandbars." (page 190).

With respect to potential impacts occurring with the change in flows, it should be noted that sand in the Grand Canyon is transported almost exclusively by river flows. The amount of sand transported increases exponentially with increases in river flow. Maintaining sandbars over the long term depends on the amount of sand supplied by tributaries, monthly release volumes, range of flow fluctuations, and the frequency and distribution of flood flows. Conversely, occasional flows between 20,000 and 25,000 cubic feet per second may cause minor beach building, and may provide water to riparian vegetation.

As part of the EIS, the effects of each alternative on long-term sand storage in Marble Canyon (river miles 0 to 61) were analyzed. The Marble Canyon reach was chosen for analysis because it is more sensitive to impacts from dam operations than downstream reaches. For each fluctuating flow alternative, the analysis used 20 years of hourly flow modeled by Spreck Rosekrans of the Environmental Defense Fund and 85 different hydrologic scenarios (each representing 50 years of

monthly flow data). This analysis was documented in the draft EIS on page 182, and Appendix D, pages 4-5. The analyses relating to the probability of net gain in riverbed sand for each alternative is documented in the draft EIS on pages 54-55, 184, 187, and 194.

Specific peer reviewed studies relating to the above analyses are listed in Attachment 1.

**COMMENT:** Do not change the upramp rate and maximum flow criteria at the same time. While acknowledging Reclamation's good efforts to identify and establish optimum operating criteria for all users of Glen Canyon Dam, changing two flow criteria (upramp rate and maximum flow criterion of preferred alternative) does not make prudent scientific sense. It will not result in reliable data. Not enough information is at hand to predict the outcome of these proposals.

**RESPONSE:** Viewed from the purely scientific viewpoint, it would be preferable to change variables one at a time in a controlled experiment. However, many uncontrolled variables already exist, and from a resource management standpoint the interest lies in measuring the possible resource impact, if any, which might result from jointly changing both criteria. The best available information suggests that the long-term impact of changing both criteria at once will be difficult, if not impossible to detect.

Even though both parameters would change, for 8 months of an 8.23 million acre foot year (minimum release year), only the upramp rate will be used. The ability to operationally exceed 20,000 cubic feet per second only exists in months in which releases are in excess of 900,000 acre feet. In a minimum release year, flows above 20,000 cubic feet per second will most likely occur in December, January, July, and August. Evaluation of the upramp rates can be initiated immediately with the evaluation of the increase in maximum flow relegated to the months with the highest volumes. New upramp and maximum flow criteria would be recommended through the Adaptive Management Program should monitoring results indicate that either of these criteria are resulting in adverse impacts to the natural, cultural, or recreational (human safety) resources of the Grand Canyon differing from those shown in the final EIS.

**COMMENT:** "Habitat/Beach Building Floods" designed to redeposit sediment and reshape the river's topography much like the Canyon's historic floods should be conducted. An experimental release based on this premise is critical to restore some of the river's historic dynamics; without it, any flow regime will result in continued loss of beach and backwater habitat. This "spike" should be assessed and implemented for the spring of 1996, subject to a critical evaluation of its flow size, timing, impact on fisheries, and completion of a comprehensive monitoring plan. Recent side-canyon floods underscore the need for restoring natural processes.

**RESPONSE:** Reclamation and the Cooperating Agencies continue to support this concept. The preferred alternative supports such a flow regime. A test flow was conducted this spring. The results of this flow are currently being analyzed. We expect to conduct more of these flows in the future.

**COMMENT:** Endorse the Fish & Wildlife Service's Biological Opinion and implement

experimental steady flows to benefit native fishes, subject to the results of a risk/benefit analysis now in progress.

**RESPONSE:** The preferred alternative provides for experimental steady flows through the Adaptive Management Program for the reasons put forth in the Biological Opinion.

**COMMENT:** **Fund and implement immediately an Adaptive Management Program.** This is the appropriate forum to address important issues. It is imperative that resource management rely on good science to monitor, and respond to possible adverse effects resulting from changes in dam operations.

**RESPONSE:** The preferred alternative provides for implementation of an Adaptive Management Program.

**COMMENT:** **Interior Secretary Babbitt should issue a Record of Decision by December 31, 1995,** and conduct an efficient and timely audit by the General Accounting Office as mandated by the Grand Canyon Protection Act.

**RESPONSE:** In compliance with the Grand Canyon Protection Act, Interior Secretary Babbitt could not issue the Record of Decision until considering the findings of the General Accounting Office. Those findings were issued on October 2, 1996.

**OTHER COMMENTS:** Another set of comments were received from municipalities and other power user groups. These letters made up about 3 percent of the total received and were essentially identical in content. Although the authors were not totally in agreement with the preferred alternative because of the reduction in peaking power, they believe it is a workable compromise. These letters characterized the final EIS as "...a model for resolving complex environmental issues among divergent interests." They also urged the government to protect the integrity of the process, resist efforts to overturn the FEIS, and allow the scientists' assessment to stand, in as much as the Adaptive Management Process will give Reclamation an opportunity to evaluate the effects of operational changes over time and make modifications according to scientific findings.

**RESPONSE:** While the preferred alternative may not satisfy all interests, Reclamation believes it is a workable compromise and meets the two criteria set out in the EIS for the reoperation of the dam, namely restoring downstream resources and maintaining hydropower capability and flexibility.

A letter of comment from the Environmental Protection Agency (EPA) indicates that EPA's comments on the draft EIS were adequately addressed in the final EIS. It also expresses their support for the preferred alternative.

Samples of the comment letters and cards, and a copy of EPA's comment letter are included as Attachment 2.

## VI. ENVIRONMENTAL COMMITMENTS AND MONITORING

The following environmental and monitoring commitments will be carried out under the preferred alternative or any of the other restricted fluctuating or steady flow alternatives described in the final EIS. A detailed description of these commitments can be found on pages 33 - 43 of that document. All practicable means to avoid or minimize environmental harm from the preferred alternative have been adopted.

- 1. Adaptive Management:** This commitment includes the establishment of an Adaptive Management Workgroup, chartered in accordance with the Federal Advisory Committee Act; and development of a long-term monitoring, research, and experimental program which could result in some additional operational changes. However, any operational changes will be carried out in compliance with NEPA.
- 2. Monitoring and Protection of Cultural Resources:** Cultural sites in Glen and Grand Canyons include prehistoric and historic sites and Native American traditional use and sacred sites. Some of these sites may erode in the future under any EIS alternative, including the no action alternative. Reclamation and the National Park Service, in consultation with Native American Tribes, will develop and implement a long-term monitoring program for these sites. Any necessary mitigation will be carried out according to a programmatic agreement written in compliance with the National Historic Preservation Act. This agreement is included as Attachment 5 in the final EIS.
- 3. Flood Frequency Reduction Measures:** Under this commitment, the frequency of unanticipated floods in excess of 45,000 cubic feet per second will be reduced to an average of once in 100 years. This will be accomplished initially through the Annual Operating Plan process and eventually by raising the height of the spillway gates at Glen Canyon Dam 4.5 feet.
- 4. Beach/Habitat-Building Flows:** Under certain conditions, steady flows in excess of a given alternative's maximum will be scheduled in the spring for periods ranging from 1 to 2 weeks. Scheduling, duration, and flow magnitude will be recommended by the Adaptive Management Work Group and scheduled through the Annual Operating Plan process. The objectives of these flows are to deposit sediment at high elevations, re-form backwater channels, deposit nutrients, restore some of the natural system dynamics along the river corridor, and help the National Park Service manage riparian habitats.
- 5. New Population of Humpback Chub:** In consultation with the U.S. Fish and Wildlife Service (FWS), National Park Service, and Arizona Game and Fish Department (AGFD), Reclamation will make every effort (through funding, facilitating, and technical support) to ensure that a new population of humpback chub is established in the mainstem or one or more of the tributaries within Grand Canyon.
- 6. Further Study of Selective Withdrawal:** Reclamation will aggressively pursue and support research on the effects of multilevel intake structures at Glen Canyon Dam and use the results of this research to decide whether or not to pursue construction. FWS, in consultation with AGFD,

will be responsible for recommending to Reclamation whether or not selective withdrawal should be implemented at Glen Canyon Dam. Reclamation will be responsible for design, NEPA compliance, permits, construction, operation, and maintenance.

**7. Emergency Exception Criteria:** Operating criteria have been established to allow the Western Area Power Administration to respond to various emergency situations in accordance with their obligations to the North American Electric Reliability Council. This commitment also provides for exceptions to a given alternative's operating criteria during search and rescue situations, special studies and monitoring, dam and power plant maintenance, and spinning reserves.

## **VII. BASIS FOR DECISION**

The goal of selecting a preferred alternative was not to maximize benefits for the most resources, but rather to find an alternative dam operating plan that would permit recovery and long-term sustainability of downstream resources while limiting hydropower capability and flexibility only to the extent necessary to achieve recovery and long-term sustainability.

Based on the impact analysis described in the final EIS, three of the alternatives are considered to be environmentally preferable. They are: the Moderate Fluctuating Flow Alternative, the Modified Low Fluctuating Flow Alternative, and the Seasonally Adjusted Steady Flow Alternative. Modified Low Fluctuating Flow is selected for implementation because it satisfies the critical needs for sediment resources and some of the habitat needs of native fish, benefits the remaining resources, and allows for future hydropower flexibility, although there would be moderate to potentially major adverse impacts on power operations and possible decreases in long-term firm power marketing. Nearly all downstream resources are dependent to some extent on the sediment resource. This alternative meets the critical requirements of the sediment resource by restoring some of the pre-dam variability through floods and by providing a long-term balance between the supply of sand from Grand Canyon tributaries and the sand-transport capacity of the river. This, in turn, benefits the maintenance of habitat. The critical requirements for native fish are met by pursuing a strategy of warming releases from Glen Canyon Dam, enhancing the sediment resource, and substantially limiting the daily flow fluctuations.

The decision process for selecting the preferred alternative for the EIS followed a repetitive sequence of comparisons of effects on downstream resources resulting from each alternative. Alternatives resulting in unacceptable adverse effects on resources (such as long-term loss of sandbars leading to the destruction of cultural resource sites and wildlife habitat) were eliminated from further comparisons. Comparisons continued until existing data were no longer available to support assumed benefits.

All resources were evaluated in terms of both positive and adverse effects from proposed alternatives. Once it was determined that all alternatives would deliver at least 8.23 million acre feet of water annually, water supply played a minor role in subsequent resource evaluations. (One of the objectives of the "Criteria for Coordinated Long-Range Operation of Colorado River Reservoirs" is a minimum annual release of 8.23 million acre feet of water from Glen Canyon

Dam.) The alternatives covered a range of possible dam operations from maximum utilization of peaking power capabilities with large daily changes in downstream river levels (Maximum Powerplant Capacity Alternative) to the Year-Round Steady Flow Alternative that would have eliminated all river fluctuations and peaking power capabilities. Within this range, the Maximum Powerplant Capacity, No Action, and High Fluctuating Flow alternatives were eliminated from consideration as the preferred alternative because they would not meet the first criterion of resource recovery and long-term sustainability. Data indicated that while beneficial to hydropower production, these alternatives would either increase or maintain conditions that resulted in adverse impacts to downstream resources under no action. For example, under these alternatives, the sediment resource would not likely be maintained over the long-term.

At the other end of the range, the Year-Round Steady Flow Alternative was also eliminated from consideration as the preferred alternative. This alternative would result in the greatest storage of sand within the river channel, the lowest elevation sandbars, the largest potential expansion of riparian vegetation, and the highest white-water boating safety benefits. However, it would not provide the variability on which the natural processes of the Grand Canyon are dependent (e.g. beach building, unvegetated sandbars, and backwater habitats). A completely stable flow regime would encourage the growth of vegetation thereby reducing bare-sand openings and patches of emergent marsh vegetation. This would limit beach camping and reduce the habitat value of these sites. With respect to other resources, this alternative did not provide any benefits beyond those already provided by other alternatives. Steady flows could also increase the interactions between native and non-native fish by intensifying competition and predation by non-natives on native fish. Such interactions would reach a level of concern under steady flows. Finally, this alternative would have major adverse impacts on hydropower (power operations and marketing).

The Existing Monthly Volume Steady Flow Alternative was eliminated from selection as the preferred alternative for reasons similar to those discussed above for the Year-Round Steady Flow Alternative.

Although the Interim Low Fluctuating Flow Alternative performed well over the interim period (August 1991 to the present), long-term implementation of this alternative would not restore some of the pre-dam variability in the natural system. The selected Modified Low Fluctuating Flow Alternative is an improved version of the Interim Low Fluctuating Flow Alternative because it would provide for some pre-dam variability through habitat maintenance flows.

The three remaining alternatives--the Moderate Fluctuating, Modified Low Fluctuating, and Seasonally Adjusted Steady Flow Alternatives-- provide similar benefits to most downstream resources (e.g., vegetation, terrestrial wildlife, and cultural resources) with respect to increased protection or improvement of those resources (see Table II-7 in the EIS). The Moderate Fluctuating Flow Alternative provided only minor benefits to native fish over no action conditions because of the relative similarity in flow fluctuations; and the benefits from the Seasonally Adjusted Steady Flow Alternative were uncertain given the improvement in habitat conditions for non-native fish this alternative would provide. Seasonally adjusted steady flows also would create conditions significantly different from those under which the current aquatic ecosystem has developed in the last 30 years and would adversely affect hydropower to a greater extent than the

other two alternatives. The Modified Low Fluctuating Flow could substantially improve the aquatic food base and benefit native and non-native fish. The potential exists for a minor increase in the native fish population.

Although the Moderate Fluctuating, Modified Low Fluctuating, and Seasonally Adjusted Steady Flow Alternatives provide similar benefits to most downstream resources, the Modified Low Fluctuating Flow Alternative was selected as the preferred alternative because it would provide the most benefits with respect to the original selection criteria, given existing information. This alternative would create conditions that promote the protection and improvement of downstream resources while maintaining some flexibility in hydropower production. Although there would be a significant loss of hydropower benefits due to the selection of the preferred alternative (between \$15.1 and \$44.2 million annually) a recently completed non-use value study conducted under the Glen Canyon Environmental Studies indicates that the American people are willing to pay much more than this loss to maintain a healthy ecosystem in the Grand Canyon. The results of this non-use value study are summarized in Attachment 3 of the ROD.

The results of a General Accounting Office (GAO) audit mandated by the Grand Canyon Protection Act are in Attachment 4 of the ROD. This audit generally concludes that Reclamation used appropriate methodologies and the best available information in determining the potential impact of various dam flow alternatives on important resources. However, GAO identified some shortcomings in the application of certain methodologies and data, particularly with respect to the hydropower analysis. Reclamation's assumptions do not explicitly include the mitigating effect of higher electricity prices on electricity demand (price elasticity). GAO also determined that Reclamation's assumptions about natural gas prices were relatively high and that two computational errors were made during the third phase of the power analysis. According to GAO, these limitations suggest that the estimated economic impacts for power are subject to uncertainty. GAO also found limitations with some of the data used for impact analysis. Certain data was incomplete or outdated, particularly data used in assessing the economic impact of alternative flows on recreational activities. Nevertheless, the National Research Council peer reviewed both the Glen Canyon Environmental Studies and the EIS, and generally found the analysis to be adequate. The GAO audit concluded that these shortcomings and limitations are not significant and would not likely alter the findings with respect to the preferred alternative and usefulness of the document in the decision-making process. The audit also determined that most of the key parties (83 percent of respondents) support Reclamation's preferred alternative for dam operations, although some concerns remain.

## ATTACHMENT 1.

### Specific peer reviewed sediment studies:

- ✓ Beus, S. and C. Avery. 1993. The influence of variable discharge regimes on Colorado River sand bars below Glen Canyon Dam. Glen Canyon Environmental Studies, Report PHY0101, Chapters 1 through 7. Northern Arizona University, Flagstaff, AZ
- ✓ Beus, S., M.A. Kaplinski, J.E. Hazel, L. A. Tedrow, and L. H. Kearsley. 1995. Monitoring the effects of interim flows from Glen Canyon Dam on sand bar dynamics and campsite size in the Colorado River corridor, Grand Canyon National Park, AZ. Glen Canyon Environmental Studies, Report PHY 0112. Northern Arizona University, Flagstaff, AZ
- ✓ Budhu, M and R. Gobin. 1994. Monitoring of sand bar instability during the interim flows: a seepage erosion approach. Glen Canyon Environmental Studies, Report PHY 0400. University of Arizona, Tucson, AZ
- ✓ Carpenter, M., R. Carruth, Fink, D. Boling, and B. Cluer. 1995. Hydrogeology of sand bars 43.1 and 172.3L and the implications on flow alternatives along the Colorado River in the Grand Canyon. Glen Canyon Environmental Studies, Report PHY 0805. U.S. Geological Survey, Tucson, AZ
- ✓ Cluer, B. 1993. Annual Report. Sediment mobility within eddies and the relationship to rapid erosion events. Glen Canyon Environmental Studies, Report PHY 011. National Park Service, Ft. Collins, CO
- Cluer, B. and L. Dexter. 1994. An evaluation of the effects of the interim flows from Glen Canyon Dam on the daily change of beach area in Grand Canyon, AZ. Glen Canyon Environmental Studies, Report PHY 0109. Northern Arizona University, Flagstaff, AZ
- Nelson, J., N. Andrews, and J. MacDonald. 1993. Movement and deposition of sediments from the main channel to the eddies of the Colorado River in the Grand Canyon. Glen Canyon Environmental Studies, Report PHY 0800. U.S. Geological Survey, Boulder, CO
- ✓ Randle, T.J., R.I. Strand, and A. Streifel. 1993. Engineering and environmental considerations of Grand Canyon sediment management. In: Engineering Solutions to Environmental Challenges: Thirteenth Annual USCOLD Lecture, Chattanooga, TN. U.S. Committee on Large Dams, Denver, CO.
- Schmidt, J. 1994. Development of a monitoring program of sediment storage changes in alluvial banks and bars, Colorado River, Grand Canyon, AZ. Glen Canyon Environmental Studies, Report PHY 0401. Utah State University.
- Smith, J. and S. Wiele. 1994. Draft report. A one-dimensional unsteady model of discharge waves

in the Colorado River through the Grand Canyon. Glen Canyon Environmental Studies, Report PHY 0805. U.S. Geological Survey, Boulder, CO

② Werrell, W., R. Ingliss, and L. Martin. 1993. Beach face erosion in Grand Canyon National Park: A response to ground water seepage during fluctuating flow releases from Glen Canyon Dam. Glen Canyon Environmental Studies, Report PHY 0101, Chapter 4 in The influence of variable discharge regimes on Colorado River sandbars below Glen Canyon Dam, Report PHY 0101. National Park Service, Ft. Collins, CO